

SOFT SKIN

— ENTWINE —

ELITE
H O M E W E A R



ELITE
H O M E W E A R

SOFT SKIN

Composition: 100% polyester

Weight: 568 gsm

Width: 140 cm

TECHNICAL DETAILS

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >50,000 rubs

Change in shade @ 3000 revs: grade 4

Colour fastness to rubbing (dry): (BS EN ISO 105 x 12: 2002): 4-5

Colour fastness to rubbing (wet): (BS EN ISO 105 x 12: 2002): 3-4

Colour fastness to light std 5: (BS EN ISO 105 b02: 1999): 5

Wyzenbeek Abrasion (ASTM D4157): >51,000 Double Rubs

Abrasion Resistance (ASTM D4966-2016): > 50,000 revs

Seam slippage (ASTM D 4034-92): Pass

Breaking (Tensile) Strength (ASTM D5034): Warp 152.7, Fill 128.6

Tear Strength Tongue Method (ASTM D2261): Warp 14.2, Weft 6.9

Martindale Pilling (ASTM D4970): Grade 4.5

Color Fastness to Wet /Dry Crocking (AATCC 8): Wet 4.5, Dry 4.0

Flame Retardant cigarette ignition resistance (NFPA 260 standard): PASS class 1

Smolder Resistance of Materials used in Upholstered Furniture (CA TB 117:2013): pass

CARE INSTRUCTIONS:



Usage: Upholstery, Cushions.



1



2



3



4



5



6



7



8



9



10



11



12



14



15



17




18



19



22

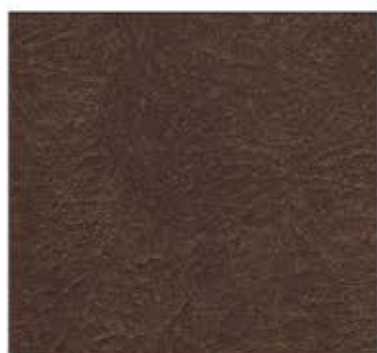


23



25



26

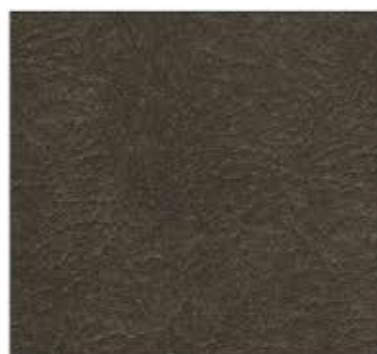

27



28