



COMPOSITION

10% polyurethane , 90% polyester

Width: 140 cm

Weight: 360 gsm

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >48,000 rubs

Colour fastness to rubbing (dry):BS EN ISO 105 x 12: 2002: 4-5

Colour fastness to rubbing (wet):BS EN ISO 105 x 12: 2002: 4-5

Colour fastness to light std 5:BS EN ISO 105 b02: 1999: 4

Color fastness to crocking (AATCC 8 -2007): dry staining: 4.5 Wet staining: 4.5

Tensile strength: (ASTM D5034-2009): warp/(length): 197.9 Weft/width (ibf): 106.4

Tearing strength: (ASTM D1424-2009): warp: untearable, Weft: 6.6 (lbf)


Seam slippage: (ASTM D434-1995):warp/(ibf): 66.6, Weft/(ibf): 68.7

CARE INSTRUCTIONS

Dry clean

Usage : Upholstery, cushions.

BUFFALO

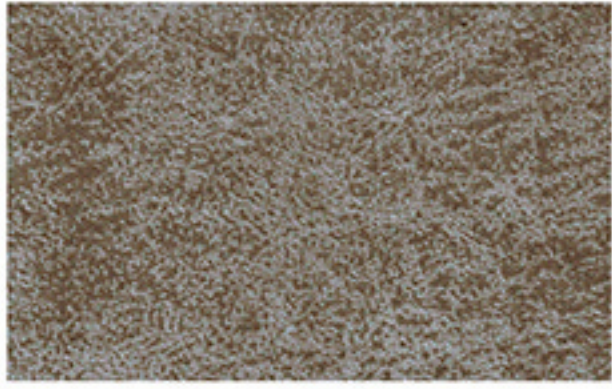


7




4




11

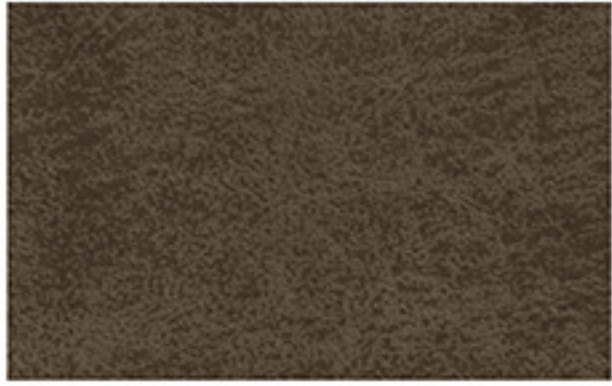

17

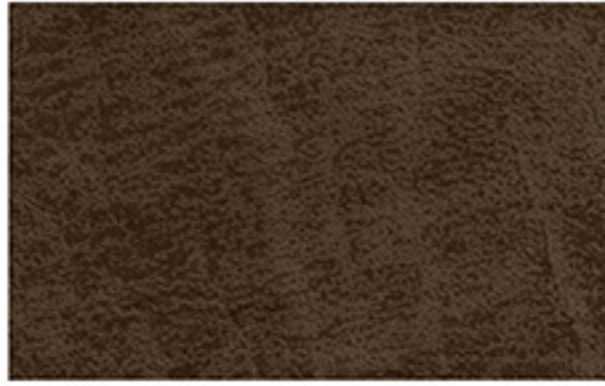

64

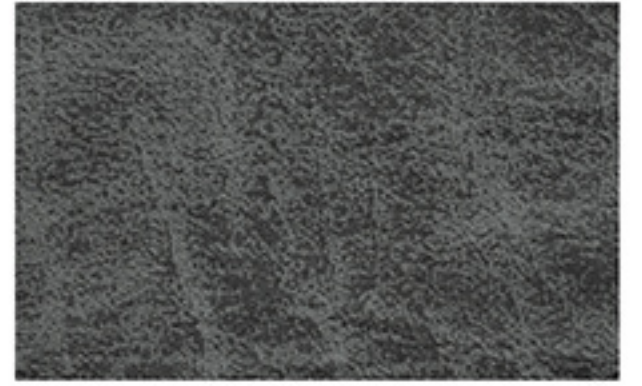

2




20




24




30

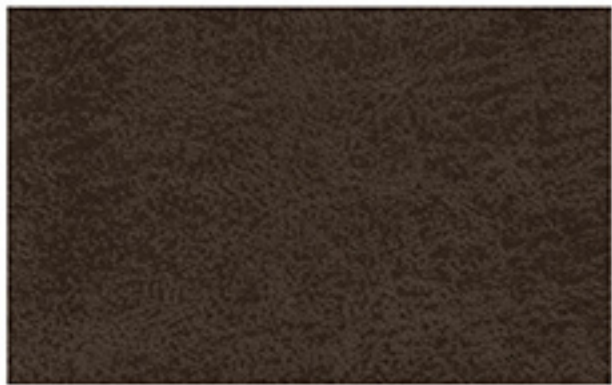


74

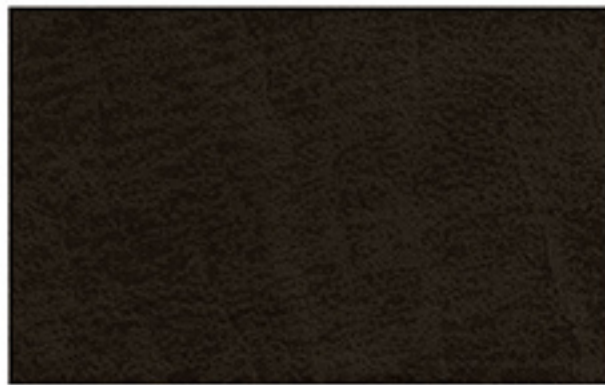


34

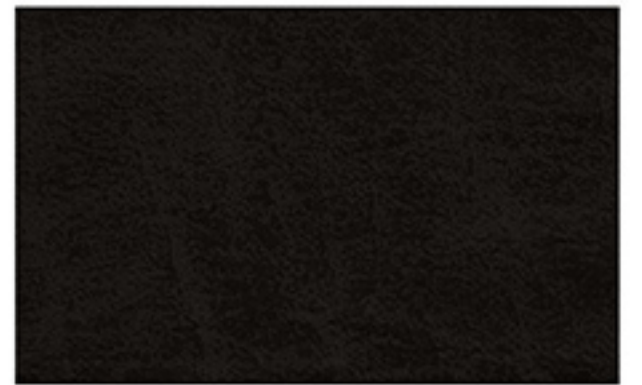

10

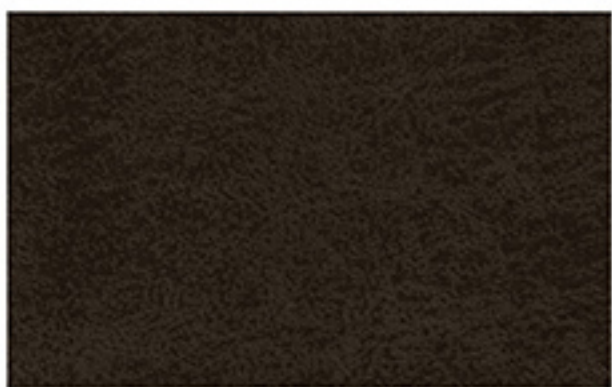

14

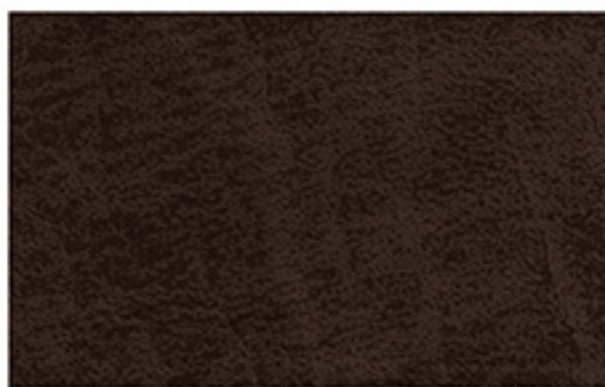

44