



SUPER SKIN

Vintage

ELITE
H O M E M E A R
S I N C E 1 9 7 2



SUPER SKIN

Vintage

Thickness 1.1mm

Composition: PU: 6.7%, PVC: 72.3%, 21% Polyester

Width 137cm (54")

Weight: 760 g/m²

Care instructions:

Clean regularly with a damp cloth or sponge

(Use lukewarm water with a mild alkaline free soap –rinse with clean water)

Do not use: solvents / concentrated abrasive or solvent cleaning products / wax polish



TECHNICAL DETAILS

Tear Strength Tongue Method (ASTM D2261): Warp 7.2, Weft 11.4

Standard Test Method for Surface Burning Characteristics of Building Materials (ASTM E84-15b) adhered to GRC board: class B

Wyzenbeek Abrasion (ASTM D415713): >185,000 heavy duty upholstery

Flame Retardant - CAL 117-2013, Section 1: PASS

Color Fastness to Light (AATCC 16 OPTION 3): 4.5

Color Fastness to Wet /Dry Crocking (AATCC 8): Wet 5, Dry 5

Flame Retardant cigarette ignition resistance (NFPA 260 standard–ASTM E1353-08ae1): PASS class 1


Cold crack resistance (CFFA 6a-2010): no cracking

Rubber- orplastics-coated fabrics - Accelerated-ageing tests (Tropical test ISO 1419): week 7: Nocracking, peeling, or delamination






201

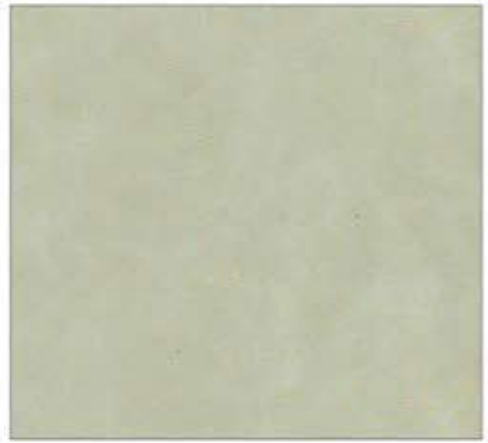

202

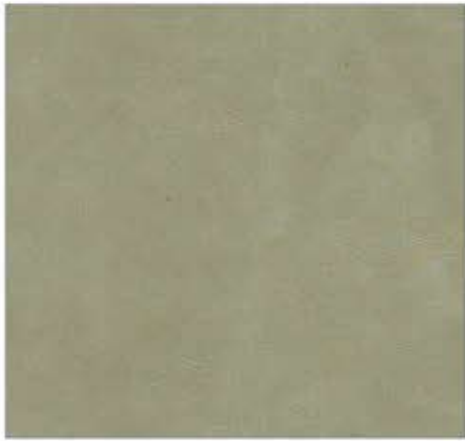

203



204



205



206



207



208



209



210



211



212



213



214